


# TYRE INFLATORS



TYRE INFLATORS

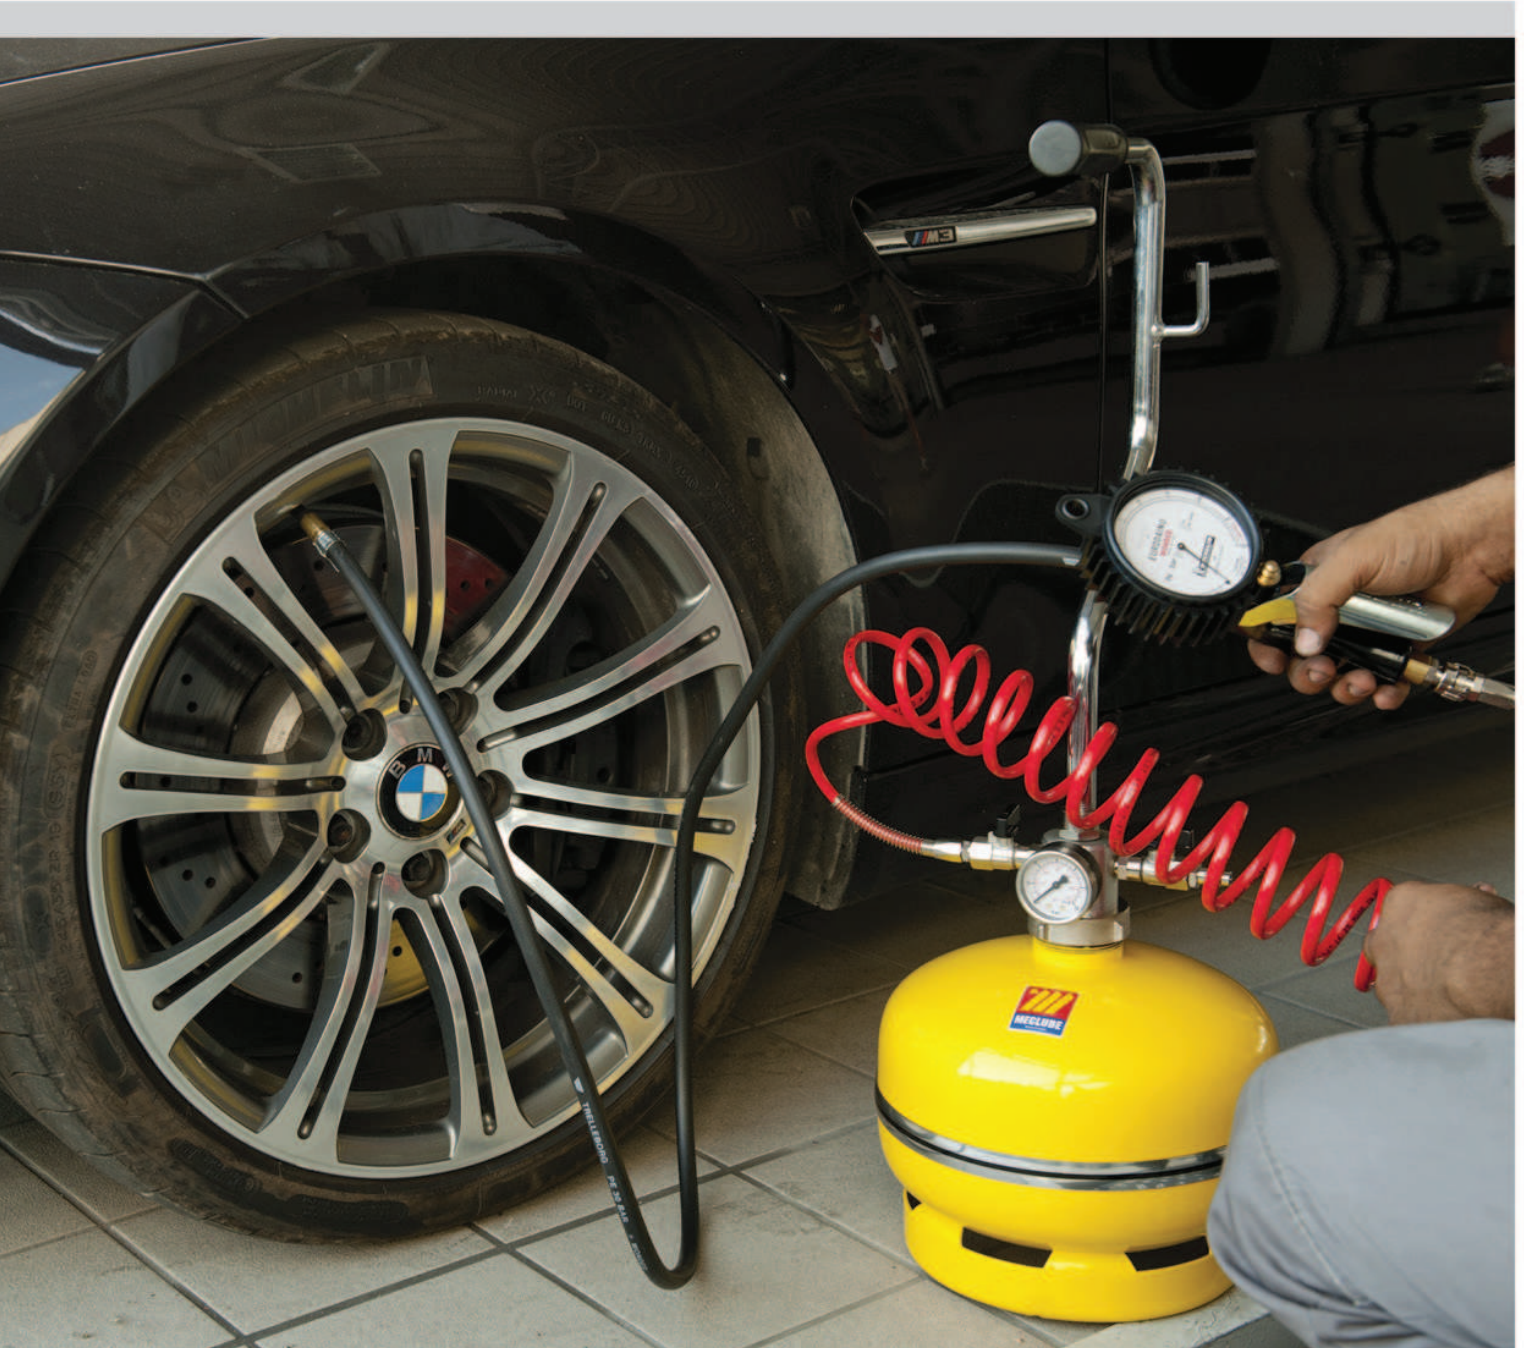

TYRE INFLATORS WITH AUTOMATIC CHARGING

pg. 156



TYRE INFLATORS WITH MANUAL CHARGING

pg. 157



WHEELED TYRE INFLATORS WITH MANUAL CHARGING

pg. 157



ACCESSORIES FOR TYRE INFLATORS

pg. 158

They are suitable for service stations and garages, for the checkup and the re-establishment of tyre pressure through the inflating valve and discharge with lever in the type with automatic charging, with the inflating gun in the type with manual charging.







060-1582-000

## Art. 060-1582-000

Approved CEE tyre inflator 12 l

with automatic charging

Tank capacity 12 l

Equipped with:

Approved gauge Ø 80 with scale 0-10 bar

1.20 m rubber hose with double clip-on connector

Art.063-1586-000 Automatic charger




060-1582-000

11,100

0,074

1



060-1583-000

## Art. 060-1583-000

Approved CEE portable tyre inflator 12 l

with automatic charging with support

Tank capacity 12 l

Equipped with:

Approved gauge Ø 80 with scale 0-10 bar

1.20 m rubber hose with double clip-on connector

Support with automatic charger



060-1583-000

13,320

0,136

1



063-1586-000

## Art. 063-1586-000

Automatic charger for tyre inflators

Connection M 1/2" G

Technical data		060-1582-000	060-1583-000
Max pressure tank	bar	10	10
Max working pressure	bar	8	8
Calibrated safety	bar	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10

They are suitable for service stations and garages, for the inspection and the re-establishment of tyre pressure through the inflating and deflating valve lever. They have automatic charging in order to be ready for use. The operation of inflation and deflate of the tyres will be effected through an unique three positions lever. To have the tyre inflator ready for use you can only put on the automatic charging mounted on the line of the compressed air.

**NOTE: APPROVED FOR PUBLIC USE**

## Art. 061-1590-000

Portable tyre inflator with manual charging 12 l

Tank capacity 12 l

Equipped with:

Reading gauge Ø 50 mm 0-10 bar

Art.063-1596-000 5 m RILSAN spring hose

Art.063-1597-000 Inflating gun with Ø 63 gauge

## Art. 061-1591-000

Portable tyre inflator with manual charging 12 l

Like art.061-1590-000 but with:

Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge

## Art. 061-1594-000

Wheeled tyre inflator with manual charging 24 l

Tank capacity 24 l

Equipped with:

Reading gauge Ø 80 mm 0-10 bar

Art.063-1596-000 5 m RILSAN spring hose

Art.063-1597-000 Inflating gun with Ø 63 gauge

## Art. 061-1595-000

Wheeled tyre inflator with manual charging 24 l

Like art.061-1594-000 but with:

Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge




061-1591-000



061-1595-000



061-1590-000	11,000	0,081	1
061-1591-000	11,200	0,081	1
061-1594-000	11,090	0,074	1
061-1595-000	11,240	0,074	1



Technical data		061-1590-000	061-1591-000	061-1594-000	061-1595-000
Max pressure tank	bar	10	10	10	10
Max working pressure	bar	8	8	8	8
Calibrated safety valve	bar	10	10	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10	0-10	0-10

They are necessary in service stations and garages, for the inspection and the re-establishment of tyre pressure through the inflating gun with gauge scale 0-10 bar.





063-1596-000

### Art. 063-1596-000

5 m RILSAN spring hose

1/4 "M bayonet fitting connection



063-1597-000

### Art. 063-1597-000

Inflating gun with Ø 63 gauge

Scale 0-10 bar + 0-140 PSI

Rubber gauge-cover



063-1598-000

### Art. 063-1598-000

Approved inflating gun with Ø 80 gauge,

approved to European Directive CEE 86/217

Scale 0-10 bar

Rubber gauge-cover



063-1598-A00

### Art. 063-1598-A00

Michelin approved inflating eurodair gun with Ø 80 gauge

approved to European Directive CEE 86/217

Scale 0.7-12 bar

Rubber gauge-cover



063-1599-000

### Art. 063-1599-000

Angle head connector for twin tyres



063-1581-000

### Art. 063-1581-000

Swiveling closed hose reel for inflating tyres

Equipped with:

Art.075-4301-211 Swiveling closed hose reel with hose PU 8x13 20 bar 11 m

Art.063-1598-A00 Michelin approved inflating eurodair gun with Ø 80 CEE gauge

It is equipped with a wall-fixing bracket which makes the fixing to wall easier.

The connection of the hose reel to the wall-fixing bracket is very fast and it allows a quick connection and disconnection.

The continuous connection to the compressed air system allows the system of inflation ready to use.



063-1581-000 13,220 0,026 1





