



CAR FILLING



FUEL MANAGEMENT SYSTEMS



KITS



PUMPS



METERS



METERED NOZZLES

DELPHIN PRO_X

FEATURES

- FULLY AUTOMATIC
- 100% COMPATIBLE WITH ALL CARS AND VEHICLES**
- AUTOMATIC FLOW RATE REGULATION
- PRESET QUANTITY

DELPHIN PRO_X is the latest innovation within the PIUSI AdBlue® car filling equipment: preset function, automatic FLOW RATE regulation and visual diagnostic alert are just few of its main new features. This dispenser comes both in AC and DC version, and, thanks to the sturdy and adjustable cart, it can easily support 60/200 ltrs drums.

The AUTOMATIC FLOW RATE function adjust the FLOW RATE according to the vehicle's tank. While the PRESET allow to pre-define the total amount of AdBlue® to be filled in the car tank.

PERFORMANCE

2-15 L/MIN

FLOW RATE

AC/DC

VOLTAGE

POWER

2M

HOSE LENGTH



DELPHIN PRO_X



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0100400	43,5	96	770X1080X800	0,3X42,1X31,5	4	1
FO0100410	51	112,5	770X1080X800	0,3X42,1X31,5	4	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

FUNCTIONING



AUTOMATIC FLOW RATE

The fastest automatic way to refill any car. Thanks to this option, DELPHIN PRO_X automatically adjust the flow rate according to the vehicle's tank.



PRESET

By pre-setting the needed quantity the operator can concentrate on something else while DELPHIN PRO_X is refilling. DELPHIN PRO_X will stop automatically when the preset quantity will be reached.

IN THE BOX

- DELPHIN PRO_X UNIT
- AF2 CONNECTOR
- INSTRUCTION MANUAL

DETAILS




UNIVERSAL ISO CONNECTOR



AF2 CONNECTOR

DIMENSIONS

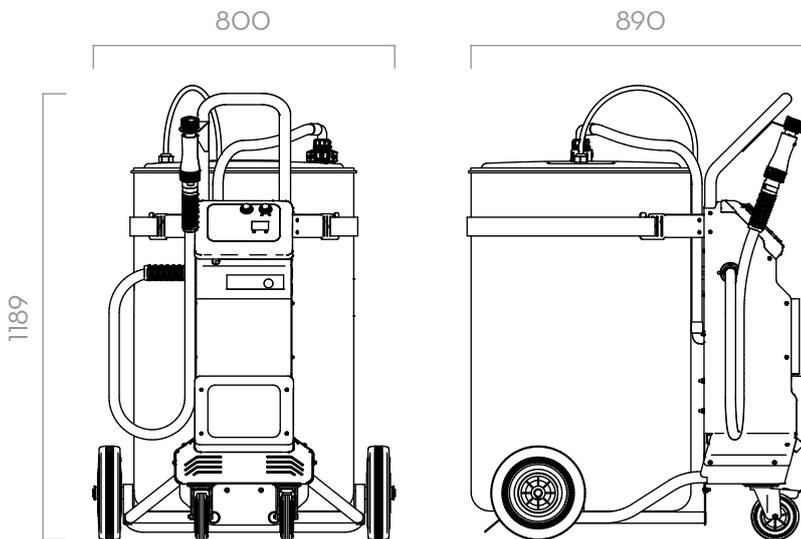

Dimensions expressed in millimeters

MATERIALS

- PUMP:
- BODY: POLIPROPYLENE
- DIAPHRAGM: POLIPROPYLENE

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			HOSE		ON/OFF
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	LENGHT	Ø	SWITCH
FO0100400	DELPHIN PRO_X AC		2 - 15	0,5 - 4	230/50	260	2,2	2 M	3/4"	YES
FO0100410	DELPHIN PRO_X DC		2 - 15	0,5 - 4	230/50**	260*	2,2**	2 M	3/4"	YES

* BATTERY CHARGER
**IN ACCORDANCE TO ISO/FDIS 22241-4:2009

DELPHIN PRO_X

FILLING SYSTEMS